
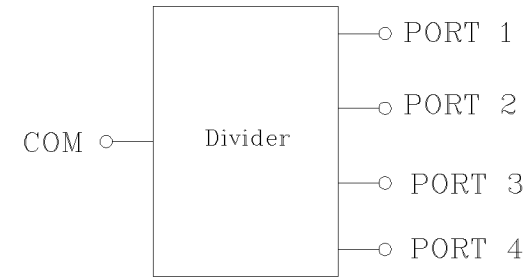


REVISIONS			
REV		DATE	APPROVED

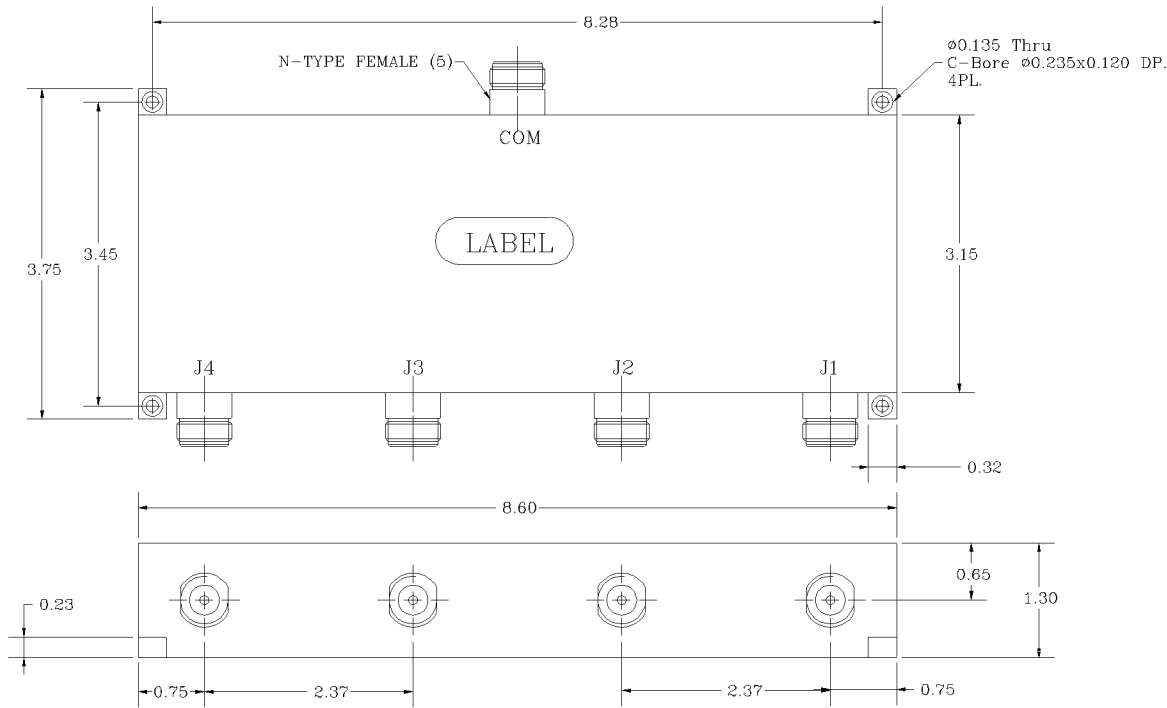

### Electrical Specifications

- \*Frequency Range [MHz] : 360 - 520
- \*Insertion Loss above 6.0 dB [dB] : < 0.6 Typ.
- \*Amplitude Balance between Ports [dB] : +/-0.3 (Max.)
- \*Phase Balance between Ports [degrees] : +/-3.0 (Max.)
- \*Isolation between Ports [dB] : 18 Typ.
- \*Pass Band VSWR : < 1.25:1
- \*Input/Output Impedance : 50 ohm
- \*RF Forward Power Capability CW : 50 Watts
- \*Reverse Power Capability CW : 5 Watts

OPERATING TEMPERATURE RANGE: -30°C TO +55°C

PROPRIETARY DOCUMENT:  
THE CONTENTS OF THIS DOCUMENT WITH ALL INFORMATION AND PROCESSES ARE THE SOLE PROPERTY OF G-Way Microwave. THIS DOCUMENT MAY NOT BE DUPLICATED OR DISCLOSED TO ANY PARTY EXCEPT BY EXPRESSLY WRITTEN PERMISSION. THE ONLY AUTHORIZED USE OF THIS DOCUMENT BY A VENDOR IS FOR QUOTE PURPOSES AND SAID VENDOR AGREES NOT TO DISCLOSE ITS CONTENTS TO ANY THIRD PARTY. THIS DOCUMENT IS COPYRIGHTED 1998.

#### NOTES:

- 1.BREAK ALL CORNERS & EDGES.005/.010.
- 2.FINAL FINISH:  
TEXTURED EPOXY BLACK - OPTIONAL.

DIMENSIONS ARE IN INCHES: TOLERANCES ARE ANGLES DECIMALS		CONTRACT NO:		<b>G-Way Microwave</b>			
± 1"	.X ± .05 .XX ± .01 .XXX ± .003	APPROVALS	DATE	TITLE 4-Ways Power Divider			
TREATMENT		DRAWN Sivak 04/07		360-520 MHz			
FINISH	63/	ENG.		SIZE	CAGE CODE	DWG NO:	REV.
MATERIAL	AL6061-76	DESIGN ACTIVITY		A	3K1H4	MSI-B0460	0
				SCALE	None		SHEET 1 OF 1