
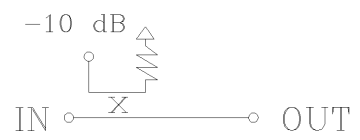


REVISIONS			
REV		DATE	APPROVED

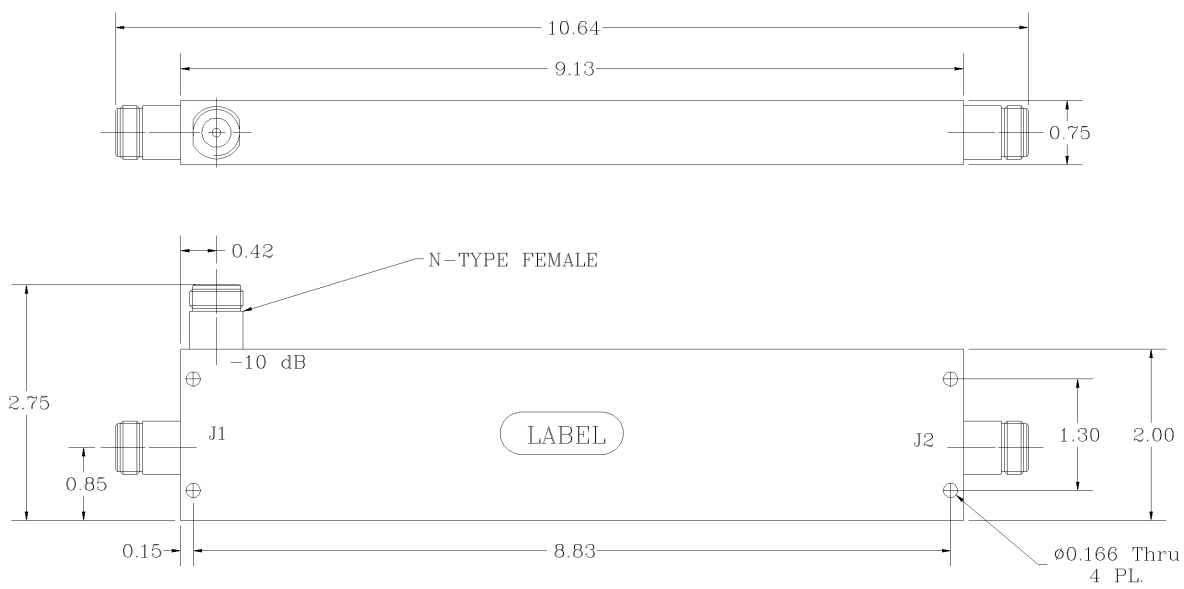

Electrical Specifications

- *Frequency Range [MHz] : 380 - 520
- *Insertion Loss [dB] : 0.2 (Typ.)
- *Frequency Sensitivity [dB] : +/- 1.0
- *Coupling [dB] : 10.0
- *Directivity [dB] : 25 (Min.)
- *Intermodulation, PIM [dBc]
with 2 tones of 43 dBm : <-140 (Max.)
- *Coupled Loss [dB] : 0.454
- *Coupling at 150 MHz [dB] : ~15
- *Coupling at 80 MHz [dB] : ~21
- *Pass Band VSWR : 1.15:1 (Typ.)
- *Input/Output Impedance : 50 ohm
- *RF Power Capability CW : 200 Watts

OPERATING TEMPERATURE RANGE: -35°C TO +75°C

PROPRIETARY DOCUMENT:
THE CONTENTS OF THIS DOCUMENT WITH ALL INFORMATION AND PROCESSES ARE THE SOLE PROPERTY OF G-Way Microwave. THIS DOCUMENT MAY NOT BE DUPLICATED OR DISCLOSED TO ANY PARTY EXCEPT BY EXPRESSLY WRITTEN PERMISSION.
THE ONLY AUTHORIZED USE OF THIS DOCUMENT BY A VENDOR IS FOR QUOTE PURPOSES AND SAID VENDOR AGREES NOT TO DISCLOSE ITS CONTENTS TO ANY THIRD PARTY. THIS DOCUMENT IS COPYRIGHTED 1998.

NOTES:
1. FINISH : Passivated AL.

SKU # 98001039

DIMENSIONS ARE IN INCHES. TOLERANCES ARE: ANGLES DECIMALS ± 1° .X ± .05 .XX ± .01 .XXX ± .003		CONTRACT NO:		G-Way Microwave	
TREATMENT		APPROVALS	DATE		
FINISH 63 ✓		DRAWN Sivak 07/13		SIZE A	CAGE CODE 3K1H4
MATERIAL AL6061-T6		CHECKED		DWG NO: MSI-CK-27N-1	REV. 0
		DESIGN ACTIVITY		SCALE None	SHEET 1 OF 1