


REVISIONS			
REV		DATE	APPROVED

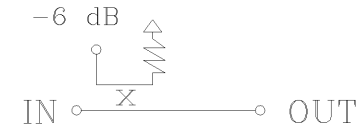

Electrical Specifications

- *Frequency Range [MHz] : 360 - 520
- *Insertion Loss [dB] : 0.7 (Typ.)
- *Frequency Sensitivity [dB] : +/- 0.7
- *Coupling [dB] : 6.00 +/- 0.5
- *Isolation [dB] : 20 (Typ.)
- *Pass Band VSWR : 1.25:1 (Typ.)
- *Input/Output Impedance : 50 ohm
- *RF Power Capability CW : 50 Watts

OPERATING TEMPERATURE RANGE: -35°C TO +85°C

SKU # 98001037

PROPRIETARY DOCUMENT:
 THE CONTENTS OF THIS DOCUMENT WITH ALL INFORMATION AND PROCESSES ARE THE SOLE PROPERTY OF G-Way Microwave. THIS DOCUMENT MAY NOT BE DUPLICATED OR DISCLOSED TO ANY PARTY EXCEPT BY EXPRESSLY WRITTEN PERMISSION. THE ONLY AUTHORIZED USE OF THIS DOCUMENT BY A VENDOR IS FOR QUOTE PURPOSES AND SAID VENDOR AGREES NOT TO DISCLOSE ITS CONTENTS TO ANY THIRD PARTY. THIS DOCUMENT IS COPYRIGHTED 1998.

NOTES:

1. BREAK ALL CORNERS & EDGES.005/.010.
2. FINAL FINISH:
 TEXTURED EPOXY BLACK - OPTIONAL.

DIMENSIONS ARE IN INCHES: TOLERANCES ARE ANGLES DECIMALS ± 1° .X ± .05 .XX ± .01 .XXX ± .003		CONTRACT NO:		G-Way Microwave	
TREATMENT		APPROVALS	DATE		
FINISH 63/		CHECKED		6 dB Coupler	REV.
MATERIAL AL6061-T6		ENG. DESIGN ACTIVITY		360-520 MHz	0
				SIZE A CAGE CODE 3K1H4 DWG NO: MSI-B1600-6	SHEET 1 OF 1
				SCALE None	