
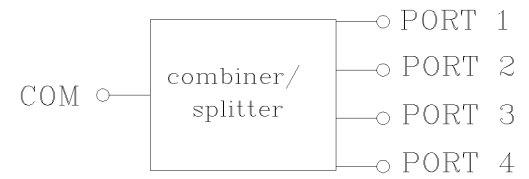
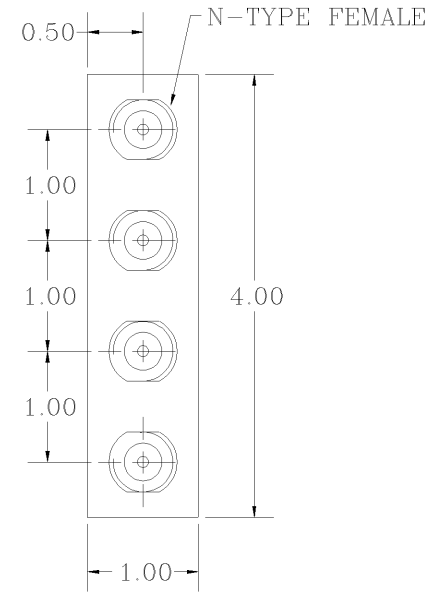


REVISIONS			
REV		DATE	APPROVED

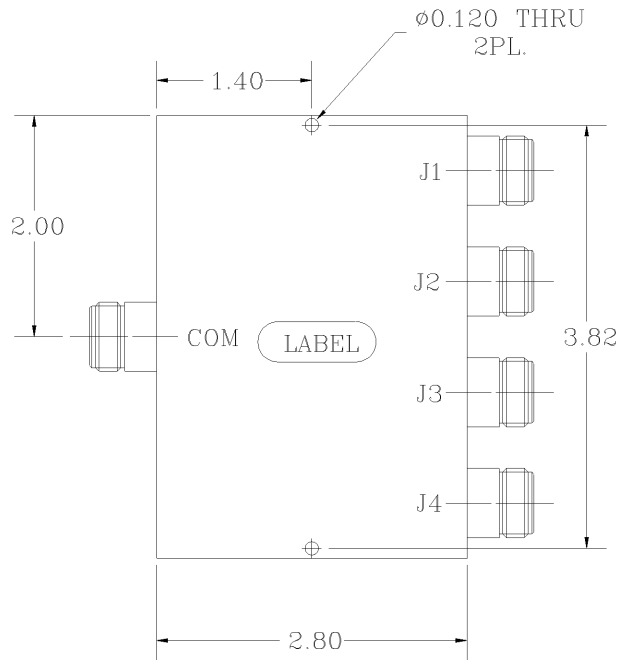

Electrical Specifications

- *Frequency Range [MHz] : 698 - 2700
- *Insertion Loss [dB] : 0.6
- *Split Loss [dB] : 6.0
- *Amplitude Balance [dB] : <0.3
- *Output Isolation [dB] : 20 (Typ.)
- *Pass Band VSWR : < 1.25:1
- *Input/Output Impedance : 50 ohm
- *RF Forward Power Capability CW : 10 Watts

OPERATING TEMPERATURE RANGE: -30°C TO +60°C

SKU # 98001043

PROPRIETARY DOCUMENT:
 THE CONTENTS OF THIS DOCUMENT WITH ALL INFORMATION AND PROCESSES ARE THE SOLE PROPERTY OF G-Wave Microwave. THIS DOCUMENT MAY NOT BE DUPLICATED OR DISCLOSED TO ANY PARTY EXCEPT BY EXPRESSLY WRITTEN PERMISSION.
 THE ONLY AUTHORIZED USE OF THIS DOCUMENT BY A VENDOR IS FOR QUOTE PURPOSES AND SAID VENDOR AGREES NOT TO DISCLOSE ITS CONTENTS TO ANY THIRD PARTY. THIS DOCUMENT IS COPYRIGHTED 1998.

- NOTES:
1. BREAK ALL CORNERS & EDGES.005/.010.
 2. FINAL FINISH: PASSIVATED ALUMINUM

DIMENSIONS ARE IN INCHES. TOLERANCES ARE:		CONTRACT NO:		G-Wave, Inc.		
ANGLES	DECIMALS	APPROVALS	DATE			
± 1°	.X ± .05 .XX ± .01 .XXX ± .001	DRAWN Sivak	07/13	MSI-LTE-B0421		
TREATMENT	CHECKED			SIZE	CAGE CODE	DWG NO:
FINISH 63 ✓	ENG.			A		MSI-D4-69FN-1
MATERIAL	DESIGN ACTIVITY					REV. 0
				SCALE None	SHEET 1 OF 1	