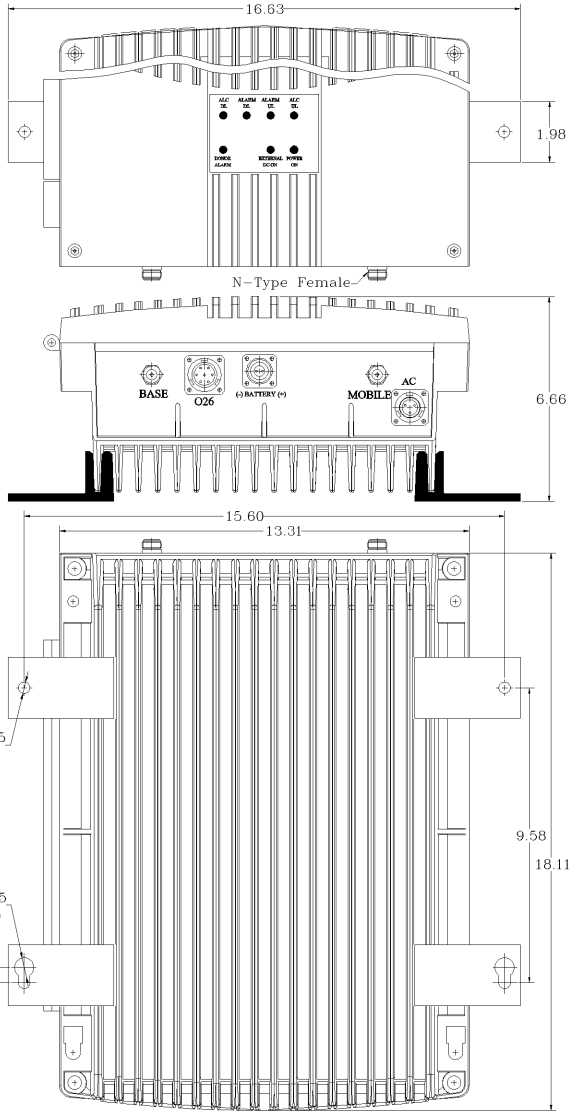

INCLUDED OPTIONS	Description
O26	Standard NFPA Compliant Remote Monitoring via 26-Pin Connector
S1	External +24 to +26.5 VDC Back Up
RED	RED Enclosure
D	Cannon type Circular AC Connector (No AC/DC Protections)
VA	Local Visual Alarms

REVISIONS			
REV		DATE	APPROVED

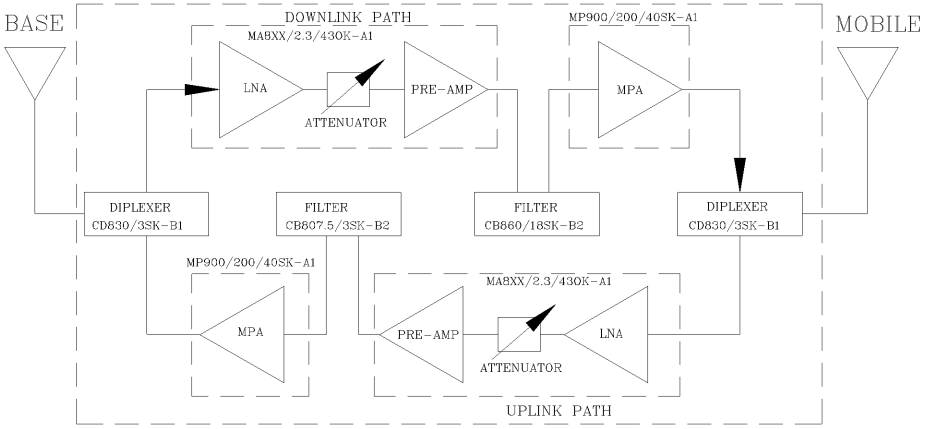

Electrical Specifications

*Down-Link (Base to Mobile) Frequency Range [MHz]		:	851 - 854
*Up-Link (Mobile to Base) Frequency Range [MHz]		:	806 - 809
*Selectivity @ +/- 2 MHz from Passband [dBc]		:	40 (Typ.)
*Gain (Minimum attenuation) [dB]		:	80 (Min.), 85 (Typ.)
*Gain Flatness [dB]		:	+/- 1.5 (Typ.)
*Noise Figure (System) [dB]		:	5.5 (Max.), 5.0 (Typ.)
*Manual Attenuation Range [dB]		:	0 - 30 in 2-dB steps
*Output Power ALC Set [dBm]	Uplink	:	+25 ±1
	Downlink	:	+30 ±1
*Output Composite Power [dBm]	Uplink	:	+25 (Typ.)
	Downlink	:	+30 (Typ.)
*3rd Order Output Intercept Point [dBm] @ 2 tones + 22 dBm each	Uplink	:	+45 (Typ.)
*3rd Order Output Intercept Point [dBm] @ 2 tones + 27 dBm each	Downlink	:	+50 (Typ.)
*Power Supply		:	110V/0.53A to 220V/.26A (Autoranging) 50 to 60 Hz
*Propagation Delay [uSec]		:	< 0.3
*Input/Output Impedance		:	50 ohm
*VSWR IN/OUT		:	< 1.5:1
*Net Weight (Estimated)		:	< 16 kg/35 lb
*PAINT: FLAT EPOXY RED			

OPERATING TEMPERATURE RANGE: −30°C TO +55°C

PIN OUT NFPA O26



PIN #	DESCRIPTION
A	1-NO DL/UL Current Alarm
B	1-COM DL/UL Current Alarm
C	1-NC DL/UL Current Alarm
D	2-NO Donor Antenna Alarm
E	2-COM Donor Antenna Alarm
F	2-NC Donor Antenna Alarm
G	3-NO DC Backup Alarm
H	3-COM DC Backup Alarm
J	3-NC DC Backup Alarm
K	
L	
M	
N	GND
P	GND
R	+12 VDC 200mA
S	+12 VDC 200mA (STNB)

WARNING. This is NOT a CONSUMER device. It is designed for installation by FCC LICENSEES and QUALIFIED INSTALLERS. You MUST have an FCC LICENSE or express consent of an FCC Licensee to operate this device. Unauthorized use may result in significant forfeiture penalties, including penalties in excess of $100,000 for each continuing violation.

WITHOUT INCLUSION OF ACSP OPTION, THIS UNIT MAY NOT BE POWERED BY A GENERATOR.

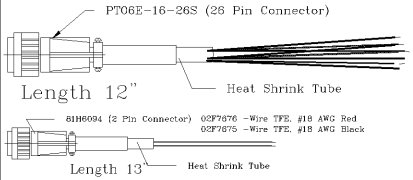

SKU # 11602196

DC Current Draw @ +24VDC: 1.94A

NEMA 4 ENCLOSURE

FCC ID: Q8KPS8N3790C

DIMENSIONS ARE IN INCHES. TOLERANCES ARE: ANGLES ± 1° DECIMALS .X ± .05 .XX ± .01 .XXX ± .003	CONTRACT NO:		**G-Wave Solutions**
	APPROVALS	DATE	TITLE: NFPA 800 MHz BDA
	DRAWN Sivak	10/16	BDA-NPSPAC/N-25/30-80-C
TREATMENT	CHECKED		SIZE A | CAGE CODE | DWG NO: BDA-NPSPAC/N-25/30-80-C-1 | REV. 0
FINISH 63	ENG.		
MATERIAL	DESIGN ACTIVITY		SCALE None | SHEET 1 OF 1