


AVAILABLE OPTIONS	Description
O26	Standard NFPA Compliant Local Alarming via 26-Pin Connector
S1	External +24 to +26.5 VDC Back Up
D	Cannon Type AC Connector (No AC/DC Protections)
RED	RED Enclosure


PIN #	DESCRIPTION
A	1-NO DL/UL Current Alarm
B	1-COM DL/UL Current Alarm
C	1-NC DL/UL Current Alarm
D	2-NO Donor Antenna Alarm
E	2-COM Donor Antenna Alarm
F	2-NC Donor Antenna Alarm
G	3-NO DC Backup Alarm
H	3-COM DC Backup Alarm
J	3-NC DC Backup Alarm
K	
L	
M	
N	GND
P	GND
R	+12 VDC 200mA
S	+12 VDC 200mA (STNB)

PIN OUT NFPA O26



WITHOUT INCLUSION OF ACS P OPTION, THIS UNIT MAY NOT BE POWERED BY A GENERATOR.

WARNING. This is NOT a CONSUMER device. It is designed for installation by FCC LICENSEES and QUALIFIED INSTALLERS. You MUST have an FCC LICENSE or express consent of an FCC Licensee to operate this device. Unauthorized use may result in significant forfeiture penalties, including penalties in excess of \$100,000 for each continuing violation.

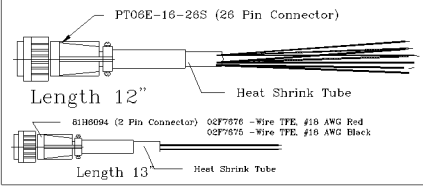


SKU # 11602348

DC Current Draw @ +24VDC: 2.39A

REVISIONS

REV	DATE	APPROVED
A	11/12	G. David

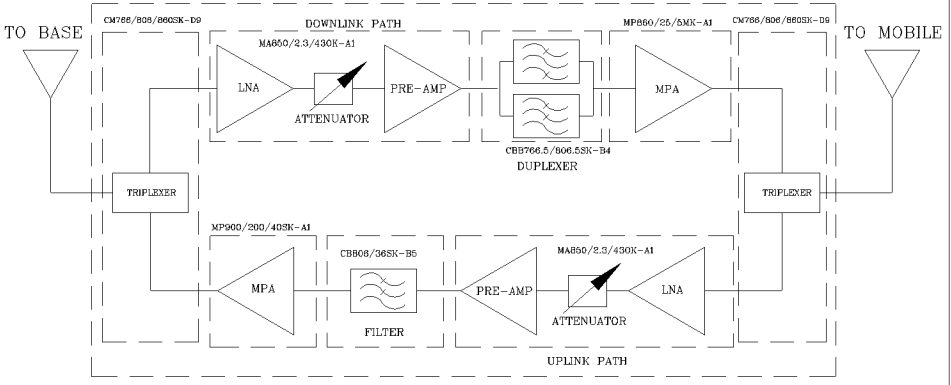

Electrical Specifications

- *Down-Link (Base to Mobile) Frequency Range [MHz] : 758 - 775
: 851 - 861
- *Up-Link (Mobile to Base) Frequency Range [MHz] : 788 - 816
- *Gain (Minimum attenuation) [dB] : 90 (Min.)
- *Gain Flatness [dB] : +/- 1.5 (Typ.)
- *Noise Figure (System) [dB] : 5.0 (Max.), 4.5 (Typ.)
- *Manual Attenuation Range [dB] : 0 - 30 in 2-dB steps
- *Output Power ALC Set [dBm]
 - Uplink : +27±1
 - Downlink : +37±1
- *Output Composite Power [dBm]
 - Uplink : +27 (Typ.)
 - Downlink : +37 (Typ.)
- *3rd Order Output Intercept Point [dBm]
 - Uplink : +48 (Typ.)
 - Downlink : +58 (Typ.)
- *3rd Order Output Intercept Point [dBm] @ 2 tones + 24 dBm each : 110V/0.65A to 220V/.33A (Autoranging) 50 to 60 Hz
- *3rd Order Output Intercept Point [dBm] @ 2 tones + 34 dBm each : <0.3
- *Power Supply : 50 ohm
- *Propagation Delay [uSec] : <1.5:1
- *Input/Output Impedance : <16 kg/ 35 lb
- *VSWR IN/OUT
- *Net Weight
- *PAINT: TEXTURED EPOXY BROWN

OPERATING TEMPERATURE RANGE: -30°C TO +55°C

NEMA 4 ENCLOSURE

DIMENSIONS ARE IN INCHES. TOLERANCES ARE:		CONTRACT NO:		G-Wave Solutions	
ANGLES	DECIMALS	APPROVALS	DATE		
± 1°	.XX ± .05 .XXX ± .01 XXX ± .003	DRAWN Sivak	11/15	TITLE NFPA 700/800 MHz LMR BDA (LTE)	
TREATMENT		CHECKED		BDA-PS7W/PS8NEPS-27/37-90-C	
FINISH	63	ENG. DESIGN ACTIVITY		SIZE	CAGE CODE
MATERIAL				A	DWG NO:
					BDA-PS7W/PS8NEPS-27/37-90-C-1
				SCALE None	SHEET 1 OF 1

FCC ID: Q8KPS78W3790