



REVISIONS

REV	DESCRIPTION	DATE	APPROVED
A	Linearity and power upgraded (PS8-25/33)	11/12	G. David

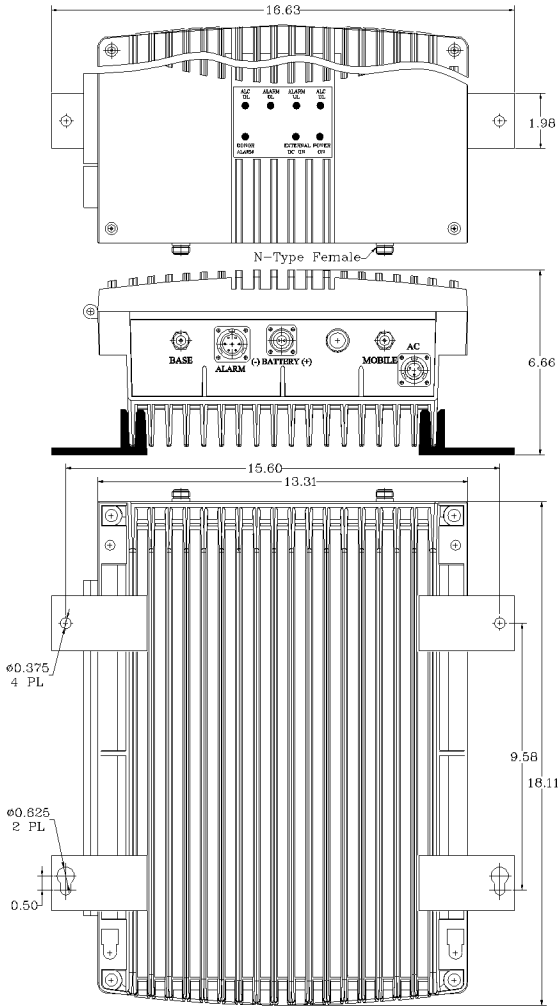

AVAILABLE OPTIONS	Description
O26	Standard NFPA Compliant Local Alarming via 26-Pin Connector
S1	External +24 to +26.5 VDC Back Up
D	Cannon Type AC Connector (No AC/DC Protections)
RED	RED Enclosure

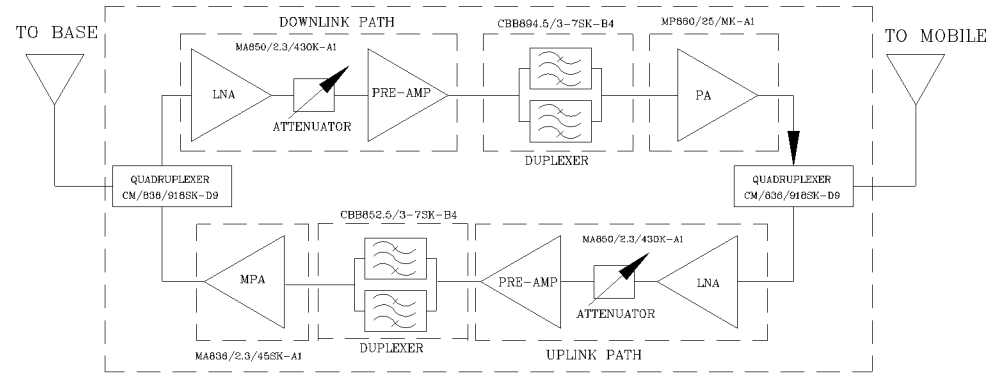


### Electrical Specifications


- \*Down-Link (Base to Mobile) Frequency Range [MHz] : 851 - 854  
: 935 - 941
- \*Up-Link (Mobile to Base) Frequency Range [MHz] : 806 - 809  
: 896 - 902
- \*Gain (Minimum attenuation) [dB] : 80 (Min.), 85 (Typ.)
- \*Gain Flatness [dB] : +/- 1.5 (Typ.)
- \*Noise Figure (System) [dB] : 5.5 (Max.), 5.0 (Typ.)
- \*Manual Attenuation Range [dB] : 0 - 30 in 2-dB steps
- \*Output Power ALC Set [dBm]
  - Uplink : +25±1
  - Downlink : +37±1
- \*Output Composite Power [dBm]
  - Uplink : +25 (Typ.)
  - Downlink : +37 (Typ.)
  - Uplink : +45 (Typ.)
  - Downlink : +58 (Typ.)
- \*3rd Order Output Intercept Point [dBm]
  - @ 2 tones + 22 dBm each
  - @ 2 tones + 34 dBm each
- \*Power Supply : 110V/0.63A to 220V/0.32A (Autoranging) 50 to 60 Hz
- \*Propagation Delay [uSec] : <0.3
- \*Input/Output Impedance : 50 ohm
- \*VSWR IN/OUT : <1.5:1
- \*Net Weight : < 16 kg/ 35 lb
- \*PAINT: FLAT EPOXY BROWN

PIN #	DESCRIPTION
A	1-NO DL/UL Current Alarm
B	1-COM DL/UL Current Alarm
C	1-NC DL/UL Current Alarm
D	2-NO Donor Antenna Alarm
E	2-COM Donor Antenna Alarm
F	2-NC Donor Antenna Alarm
G	3-NO DC Backup Alarm
H	3-COM DC Backup Alarm
J	3-NC DC Backup Alarm
K	
L	
M	
N	GND
P	GND
R	+12 VDC 200mA
S	+12 VDC 200mA (STNB)

PIN OUT NFPA O26



**WARNING.** This is NOT a CONSUMER device. It is designed for installation by FCC LICENSEES and QUALIFIED INSTALLERS. You MUST have an FCC LICENSE or express consent of an FCC Licensee to operate this device. Unauthorized use may result in significant forfeiture penalties, including penalties in excess of \$100,000 for each continuing violation.

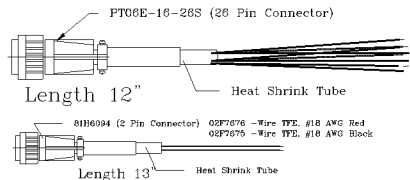

*WITHOUT INCLUSION OF ACSP OPTION, THIS UNIT MAY NOT BE POWERED BY A GENERATOR.*

SKU # 11602325

DC Current Draw @ +24VDC: 2.31A

### NEMA 4 ENCLOSURE

FCC ID: Q8KESMR2W80AN89R

DIMENSIONS ARE IN INCHES. TOLERANCES ARE:		CONTRACT NO:	
ANGLES	DECIMALS	APPROVALS	DATE
± 1"	.XX ± .05 .XX ± .01 .XXX ± .003	DRAWN Sivak	06/14
TREATMENT	CHECKED	ENG.	
FINISH	DESIGN ACTIVITY		
MATERIAL			

G-Wave Solutions			
TITLE NFPA 800/900 MHz LMR BDA			
BDA-NPSPAC/N/PS9-25/37-90-C			
SIZE	CAGE CODE	DWG NO:	REV.
A		BDA-NPSPAC/N/PS9-25/37-90-C-1	A
SCALE	None		SHEET 1 OF 1